



ProX[®]
Live Performance Gear



X-SimpleSpot™ Pack

www.ProXDirect.com

Unpacking: Thank you for purchasing the X-SimpleSpot by ProX. Every X-SimpleSpot has been thoroughly tested and has been shipped in perfect operating condition. Carefully check the shipping carton for damage that may have occurred during shipping. If the carton appears to be damaged, carefully inspect your fixture for any damage and be sure all accessories necessary to operate the unit has arrived intact. In the case damage has been found or parts are missing, please contact our toll free customer support number for further instructions. Do not return this unit to your dealer without first contacting customer support. Customer Support: 1.718.237-2299 or info@proxdirect.com

Warranty Registration: **Double your warranty (to 2 Years)** by registering your product(s) on our website here:
<https://www.proxdirect.com/support/warranty>

Introduction: The ProX X-SimpleSpot is part of our high quality intelligent lighting products. The X-SimpleSpot is a bright (3 Watt), battery powered, LED pin spot. Each X-SimpleSpot Pack contains 6 SimpleSpot 6000k Cool White SimpleSpot. Each unit will operate for up to 6 hours on a full charge. The 2 included IRC Remote Controls will enable On/Off, Strobe, Speed, Auto and Up/Down Dimmer. Each unit projects a cool white beam and gel filters are included for each light consisting of Red, Green, Blue, Warm White, Amber and White Frost. The package of 6 comes with a fabric carrying bag with cut foam that holds the charging base and all six lights plus additional storage.

Caution! There are no user serviceable parts inside this unit. Do not attempt any repairs yourself, doing so will void your manufactures warranty. In the unlikely event your unit may require service please contact ProX at 1.718.237.2299

This Manual: To optimize the performance of your SimpleSpot Pack, please read these operating instructions carefully and familiarize yourself with the basic operations of the individual units and IRC remotes. These instructions contain important safety information regarding the use and maintenance of this unit. Please keep this manual with the pack, for future reference by operators.

Cleaning Requirements: Due to dust, due, smoke, and hazer residue cleaning the internal and external optical lenses must be carried out periodically to optimize light output.


- Use a good quality glass cleaner and a soft cloth to wipe down the outside housing.
- Clean the external optics with glass cleaner and a soft cloth every 14 days of operation.
- Always make sure that parts are completely dry before charging or use.

Depending on operational environments your cleaning schedule may be higher or lower avoid very dusty conditions.

Safety Precautions:

- To prevent or reduce the risk of electrical shock or fire, do not expose this unit to rain or moisture.
- Do not spill water or other liquids into or on to your unit.
- Be sure that the local electrical outlet matches the required voltage.
- Do not attempt to operate the charging pack if the power cord has been damaged.
- Do not attempt to remove or break off the ground prong from the electrical cord. This prong is used to reduce the risk of electrical shock and fire in case of an internal short.
- Do not disassemble the units under any conditions, there are no user-serviceable parts inside.
- Always be sure to mount this unit to allow proper ventilation. Allow about 6" from the spot to the wall.
- Do not operate any **SimpleSpots** that have been damaged.
- **Indoor use only**, use of **SimpleSpots** outdoors may void all warranties.
- During long periods of non-use, do not leave charger connected.
- Always mount this unit in safe and stable matter as described in this manual.
- Do not mount near heat sources such as radiators, heat registers, stoves, or other items that produce heat.

IRC Remote Control (2 Included)

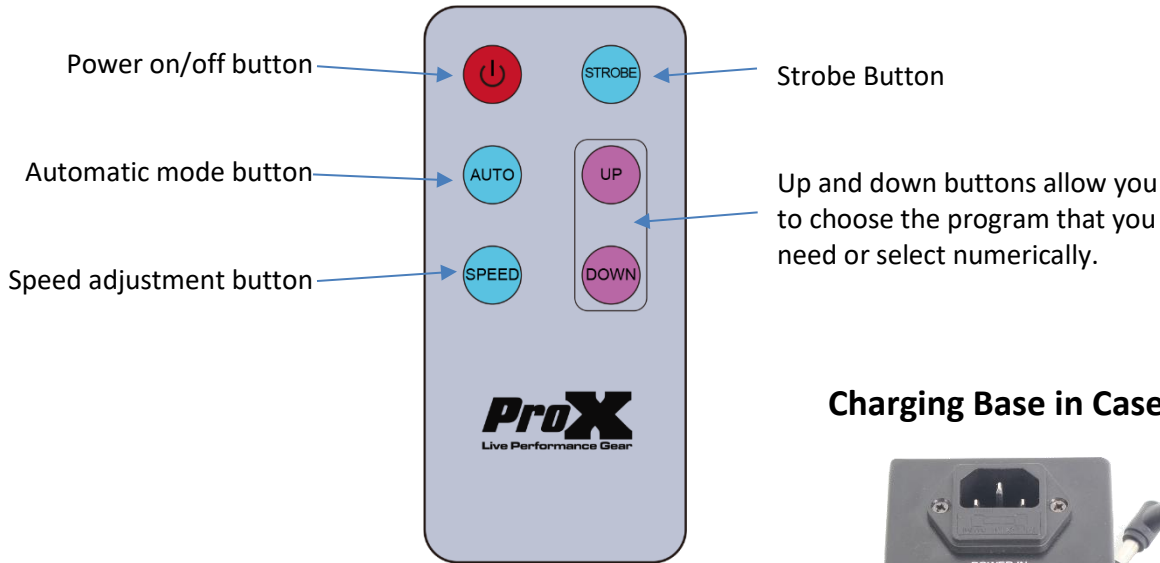

The charging base allows you to recharge up to Six (6) LED units at a time. A full charge can take up to 4 hours.

Input Power: 100-240V, 50-60HZ AC
Red indicator flashes during charge, then turns green when fully charged.

DO NOT CHARGE WITH LID CLOSED!

Charging Base in Case



Easy Two Way Mounting

The SimpleSpot is easily mounted to drop ceiling supports or can be mounted to any ferrous metal surface. It provides fast and easy setup for weddings and special events.

The SimpleSpot is most commonly used for illuminating table center pieces, accent décor, cakes and a variety of applications when you need to highlight a specific object or area!

ProX Model: X-SimpleSpot Pack™

INFORMATION & SPECIFICATIONS:

LED: Single 3W Single Cool White Cree LED

Output Intensity: 3200+ Lux at 6.5 feet

Power: 12 VDC Rechargeable Battery @ 6000mAh

Charging System: Integrated 6 Outlet Charging Base

Battery Charge Time: 4.5 Hours (With Power Switch Off)

Battery Life: 7.5 to 10 Hours depending on mode/brightness

Power Consumption: 3 W Operational - 15W (Battery Charging)

Rated Current: .55 W @ 110VAC – Fuse T5A

Beam Angle: 5 Degrees - 15 Degrees (With Frost Lens)

Weight: 1 lb. Per PinSpot

Please Note: Specifications and changes in the design and/or specifications of this product and this manual are subject to change without any prior notice.



Xstatic Pro, Inc. - ProX

901 Essex Street, Brooklyn, NY 11298

Voice 718.237.2299 – Fax: 718.237.2318

Email: info@proxdirect.com

(NO DIRECT SALES - DEALERS AND DISTRIBUTORS ONLY)

Register your products on ProXDirect.com