

Our office is closed on Monday April 29th & Tuesday April 30th for Passover



Home > Products > ProX Lighting > LED Lighting > LED Par Cans > Chameleon Outdoor IP66 Parcan RGBWA+UV

SKU: X-P6IN1-12IP

This product is discontinued


Chameleon Outdoor IP66 Parcan RGBWA+UV

Product Images



[Download Product Images](#)

Our Products And You

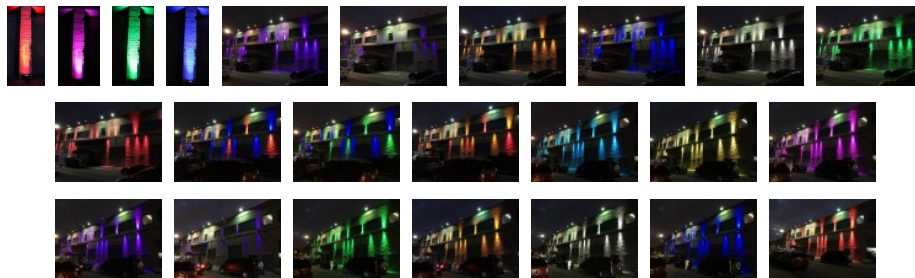

[submit your story](#)

ProX X-P6IN1-12IP Chameleon Outdoor IP66 Parcan RGBWA+UV

Description

The Xstatic Chameleon X-P6IN1-12IP Outdoor IP66 Par Can RGBWA+UV is a 144 watt LED PAR light with 15 degree viewing angle. The Xstatic Chameleon is equipped with high-powered LEDs that are rated for up to 100,000 hours while requiring little to no maintenance. It's constructed with an aluminum housing that helps heat to dissipate efficiently keeping the LEDs and other components cooler, as well as safer. The durable housings are sealed and waterproof rated IP66, making these perfectly suitable for outdoor use. The 12 x 12 Watt 6-in-1 RGBWA + UV LEDs gives the availability of the full range of colors. Additionally, internal programming is available with a super-easy to use built-in 4-button LED control panel that allows complete control over the fixture including sound active mode, master/slave settings, auto mode, built-in programs, user adjustable fade/strobe effects, and custom RGBW+UV color mixing for an amazing light show.

Features

- **IP66 certification - can be used outdoors**
- **Additional UV effects**
- **4 Different dimmer curves to choose from**
- **Color display for internal programming**
- **No fan - heat is dissipated via the aluminum housing**
- **Incl. power adapter cable with safety plug (length approx. 1.2 m),**
- **DMX Input Adapter (length approx. 0.6 m) and end caps for DMX and Power Out**
- **Light source: LM Type LED Xin1**
- **Color spectrum: RGBWAUV**
- **LED Power: 144 W (12 x 12 Watt)**
- **Modulation: 32 khz**

- Beam angle: 15A?
- Current in/out IP66 power cable
- XLR in/out IP66
- Controls: Automatic, Master-Slave, DMX512
- Select static colors on the unit
- Power in / out IP66 cable (Suitable connector cable e.g. Article Nr: 299255)
- XLR in / out IP66 (Suitable connector cable e.g. Article Nr: 299262)
- Number of DMX channels: 3 / 6 / 10 / 13
- IP protection rating: IP66
- Power supply: Voltage 110 ~ 250 V / 50 ~ 60 Hz
- Power consumption max. 120 W
- Dimensions (L x W x H): 288 x 280 x 142 mm
- Weight: 4 kg

Light Dimensions:
9.00"L X 9.00"D X 5.00"H
Weight: 11lbs

Shipping Dimensions:
11.00"L X 11.00"D X 12.00"H
Shipping Weight: 14lbs

UPC
019372405979

Our Products and You

Submit your
story

Commonly Asked Questions

+ Where can I buy one?

[submit a question](#)

Customer Testimonials

What did you think

Related Products



Aluminum Slim M10 O-Clamp with Big Wing Knob for 2" Truss Tube Capacity 165 lbs.
SKU: T-C9H



Aluminum Pro M10 O-Clamp with Big Wing for 2" Truss Tube Capacity 1102 lbs.
SKU: T-C4H

