



Home > Products > ProX Stands > Fantek® Lifting Towers >> FANTEK Spain Compact Front Loading Lifting Line Array Systems Tower 728 lbs Cap Max Height 19.52ft Incl Line Array Adapter

SKU: XTF-FT6033


Permalink:

[Search on Google](#)

FANTEK Spain Compact Front Loading Lifting Line Array Systems Tower 728 lbs Cap Max Height 19.52ft Incl Line Array Adapter

[Find A Dealer](#)

Product Images

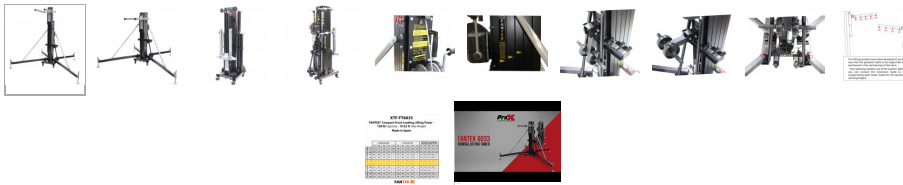

[Download Product Images](#)

Our Products And You

[Submit your story](#)

ProX XTF-FT6033 FANTEK Spain Compact Front Loading Lifting Line Array Systems Tower 728 lbs Cap Max Height 19.52ft Incl Line Array Adapter

Description

The **ProX XTF-FT6033 FANTEK® Lifting Tower** is Front Loading and allows raising the load from the floor, avoiding any single effort and specially designed for a reliable lifting of Line Array Systems of up to 330 kg (727.5 lbs) to a maximum height of 5.95 meters / 19.52 Ft. This product is perfect to fly line array systems, trusses and LED screens. The compact design with castors gives the XTF-FT6033 Rigging tower easy handling and maneuverability, reducing storage space and it is the ideal solution for touring, rental and event production (concerts, events, trade fair stands, stage construction, fitting-out discos, theaters, broadcasting, TV, etc.). This Compact model is only 5.64ft (1.72 m) folded height.

This system includes a XTF-ATF17PA Line Array Adapter W/Hanging Ring

These Patented Dynamic Overlap® stacking trusses (5 Masts) are manufactured with extruded aluminum (Alloy: EN-AW according to 6082 T6) and TIG welded by Certified Welders for maximum safety, are specially designed to be compact when folded, reducing storage space and making it easier to handle. FANTEK® towers use a reinforced steel base with outriggers that support heavy loads and high heights.

During lifting, the tower telescopic mechanism lift can stop safely at any of the Pin Locking System positions. These pins take the load off the wire rope. Additionally, the DYNSSYS® is a system designed to guarantee the "health" and good operation of the tower, since it accomplishes many functions, all focused on maximizing user safety. Each Dynsys system is adjusted to control the torque that is applied on the winch and, when this is exceeded, the system acts and does not allow to continue the lifting process. The WIREDRIVE® is a multidirectional grooved pulley that reduces the wire angle between the winch drum and its entry to the first mast. The steel base provides great stability when the adjustable screw-jacks are well balanced and the bubble level on the base provides accurate leveling. Always secure loads at a locking point and never on the winch alone!

Use with:

- [XTF-ATF17PA](#) Line Array Adapter W/Hanging Ring
- [XTF-ATF17PAM](#) Movable Line Array Adapter
- [XTF-ATF1DS](#) Reversible Truss Adapter



Lift Cable must be properly spooled to prevent damage

FANTEK

Features

- Design to fly line array systems, trussing and LED screens
- Made of quality components to ensure maximum safety
- Raise the load from the floor.
- CE - DGUV V17/18 Certified Compliant
- XT-FT6033 is Made by Fantek® in Valencia Spain.
- Minimum Height - 1.72 meters / 5.64 Feet
- Max Height - 5.95 meters / 19.52 Feet
- Max Load - 330 kg / 727.5 lbs
- Winch - 900 kg / 1984.16 lbs
- Steel Loading Forks - 600 mm / 23.62 Inches

DGUV is a 3rd Party Certification Body and provides inspections, testing, certification & training, with the ultimate objectives of reliability, safety & high quality. CE marking is a certification mark that indicates conformity with health, safety, and environmental protection standards for products sold/manufactured within the European Economic Area (EEA).

FANTEK® was founded in 1940 and with a major expansion in 1984 and with many years of experience is the manufacturer of lifting towers in Valencia Spain, offers innovative high-end quality, reliable and efficient products to all customers worldwide. ProX Live Performance Gear is the only distributor of Fantek® Lifting Towers in the USA. The XT-FT6033 Meets strict European standards. Certified to current standards [CE - DGUV].

Exterior Dimensions & Weight

66.00"H x 20.00"W x 22.00"L - Weight: 330.00 lbs

Shipping Dimensions & Weight

Box 1 of 1: 68.00"H x 22.00"W x 24.00"L - Shipping Weight: 344.00 lbs

Suggested Shipping Method: LTL

2pcs on 1 Skid: 48x40x73 775

UPC

019372413516

Our Products and You

Submit your story

Commonly Asked Questions

+ Where can I buy one?

[submit a question](#)

Customer Testimonials

What did you think

Related Products



FANTEK Spain Compact Front Loading Lifting Line Array Systems Tower 518 lbs Cap Max Height 16 ft Incl Line Array Adapter

SKU: XTF-FT5323

FANTEK® Line Array Adapter with Hanging Ring for XTF-FT6033 Lifting Tower

SKU: XTF-ATF17PA



FANTEK® Movable Line Array Adapter with Hanging Ring for XTF-FT5323 and XTF-FT6033 Lifting Towers

SKU: XTF-ATF17PAM



FANTEK® Reversible Truss Adapter for XTF-FT5323 and XTF-FT6033 Lifts

SKU: XTF-ATF1DS



FANTEK® Line Array Adapter with Hanging Ring for XTF-FT5323 Lifting Tower

SKU: XTF-ATF16PA

